
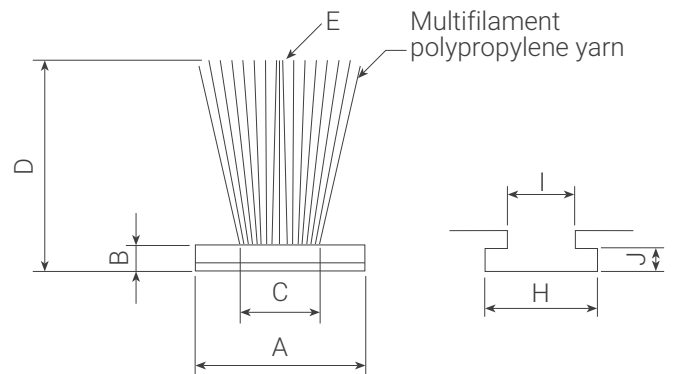


POLY-BOND (PB): WOVEN BRUSH PILE SEALS

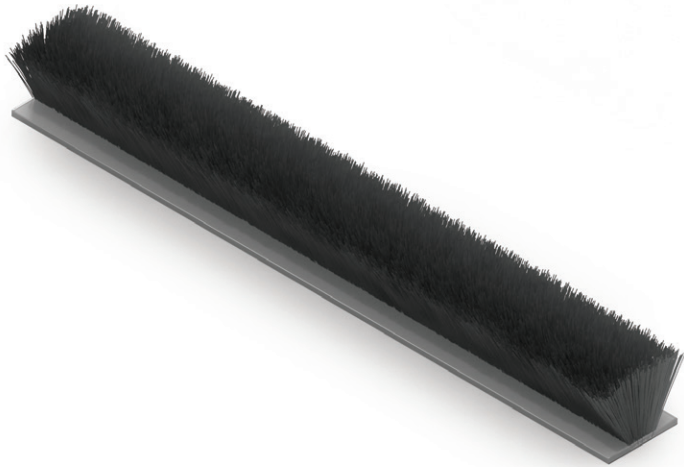

Soft silicone treated multifilament pile yarn on a woven reinforced translucent backing for all common economy sealing applications. Optional adhesive backing.

Recommended compression:

- Brush pile height from 3.0 to 5.0 mm: 5% to 10%
- Brush pile height from 5.5 to 6.5 mm: 10% to 20%
- Brush pile height from 7.0 and above 15% to 25%


	4,8	6,7	6,9
H	5,3	7,5	7,7
I	3,2	3,2	3,2
J	1,3	1,3	1,3

Minimum clearance recommended: +0.5 mm of backing width chosen

TECHNICAL SPECIFICATION

STANDARD SOLUTIONS				
A Backing width*	B Backing thickness	C Pile base width	D Brush height	E Brush density (P)
4,8 +0,10/-0,15 mm 6,7 +0,10/-0,20 mm 6,9 +0,10/-0,20 mm	0,8 ± 0,15 mm	2,4 ± 0,3 mm	3,0 ≤ D ≤ 6,5 mm (+0,25/-0,15 mm) with 0,50 mm intervals 6,5 < D ≤ 10,0 mm (+4%/-2,5%) with 0,50 mm intervals 10,0 < D ≤ 15,0 mm (+4%/-2,5%) with 1,0 mm intervals	4P

Multifilament pile yarn colours (≈ RAL)



*With optional hot-melt adhesive (HM) • Note: total height will increase up to 0,5 mm if hot-melt requested

