

CHIC 3D 100 HINGES AND ARMS

Functions

Set of hinges (top and bottom), completely pre-assembled and ready to be installed on the profile.

Technical Features

They enable tilt-and-turn opening combined with the mechanisms.

Micro-ventilation and logica versions.

The arm is equipped with micro-ventilation as standard (adjustable).

Moving the fastening pawl takes the arm from conventional to logica.

The T2 arm is adjustable: the opening "A" goes from 178 mm (base) to 148 mm.

Materials


Corner support made of zamak

Connecting brackets and hinge plates made of zinc plated steel


Pins made of 304 grade stainless steel and aluminium bronze

Cams made of zinc plated steel


Connecting bracket and arm rod made of 304 grade stainless steel

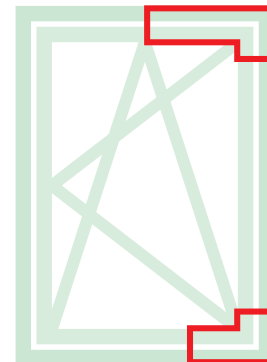

Online data sheet

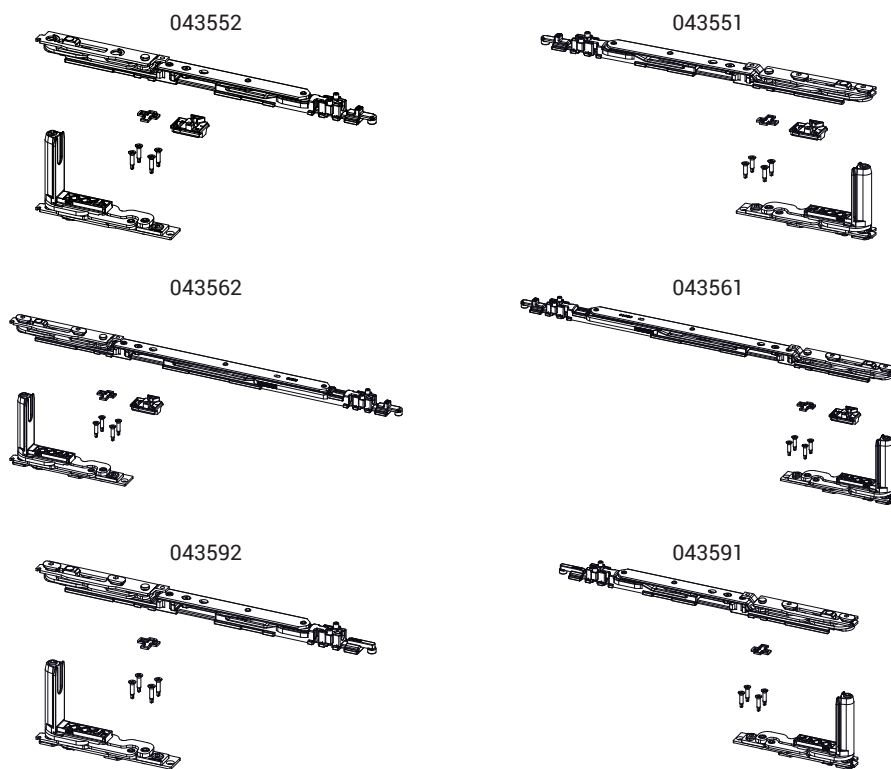

Sash opening

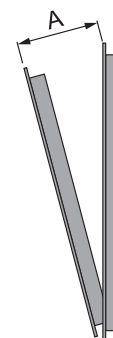

Item code	Description	PROFILE CROSS - SECTION	Range (mm)	Version	A (mm)	Hand	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
043551	CHIC - T1 ARM T&T KIT	C001-C002-C003-C004-C005-C006	L 470 ÷ 700	Micro	98	RX	X				10
043552	CHIC - T1 ARM T&T KIT	C001-C002-C003-C004-C005-C006	L 470 ÷ 700	Micro	98	LX	X				10
043561	CHIC - T2 ARM T&T KIT	C001-C002-C003-C004-C005-C006	L 600 ÷ 1500	Micro	148÷178	RX	X				10
043562	CHIC - T2 ARM T&T KIT	C001-C002-C003-C004-C005-C006	L 600 ÷ 1500	Micro	148÷178	LX	X				10
043591	CHIC - T1 ARM T&T KIT (WITHOUT MICRO-VENTILATION)	C001-C002-C003-C004-C005-C006	L 445 ÷ 700	-	98	RX	X				10
043592	CHIC - T1 ARM T&T KIT (WITHOUT MICRO-VENTILATION)	C001-C002-C003-C004-C005-C006	L 445 ÷ 700	-	98	LX	X				10